

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
6 May 2005 (06.05.2005)


PCT

(10) International Publication Number
WO 2005/040541 A1

- (51) International Patent Classification⁷: **E06B 7/04**
- (21) International Application Number:
PCT/IT2004/000564
- (22) International Filing Date: 13 October 2004 (13.10.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
BO2003A000639 29 October 2003 (29.10.2003) IT
- (71) Applicant (for all designated States except US): **VETRO VENTILATO S.R.L** [IT/IT]; Via Longo 105, I-47023 Cesena (IT).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **SENSINI, Massimo** [IT/IT]; Via Tripoli 180, I-47023 Cesena (IT).
- (74) Agent: **MANZELLA, Giovanni**; Ing. Giovanni Manzella, Via Saragozza, 220, I-40135 Bologna (IT).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,

[Continued on next page]

(54) Title: APPARATUS FOR THE AIR CIRCULATION IN DOUBLE -GLAZED THERMOINSULATED WALLS

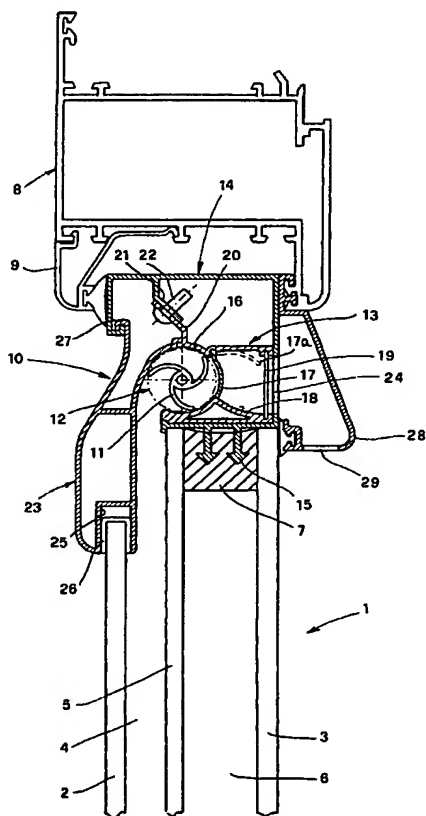

(57) Abstract: The apparatus (10) for the air circulation is fitted in double-glazed thermoinsulated walls (1), of the type constituted at least by a first internal pane (2) of glass and by a second external pane (3) of glass, positioned parallel to one another and defining a space (4) between them. The apparatus (10) comprises a tangential fan (11) of reduced size, fitted in a housing (12) and substantially extended to the full length of the thermoinsulated wall (1), which is realized at the top of said space (4) opened to the external environment.

WO 2005/040541 A1



SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Date of publication of the amended claims: 16 June 2005

Published:

- with international search report
- with amended claims

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.